


PRODUCT CATALOGUE



OUR GLOBAL PRESENCE

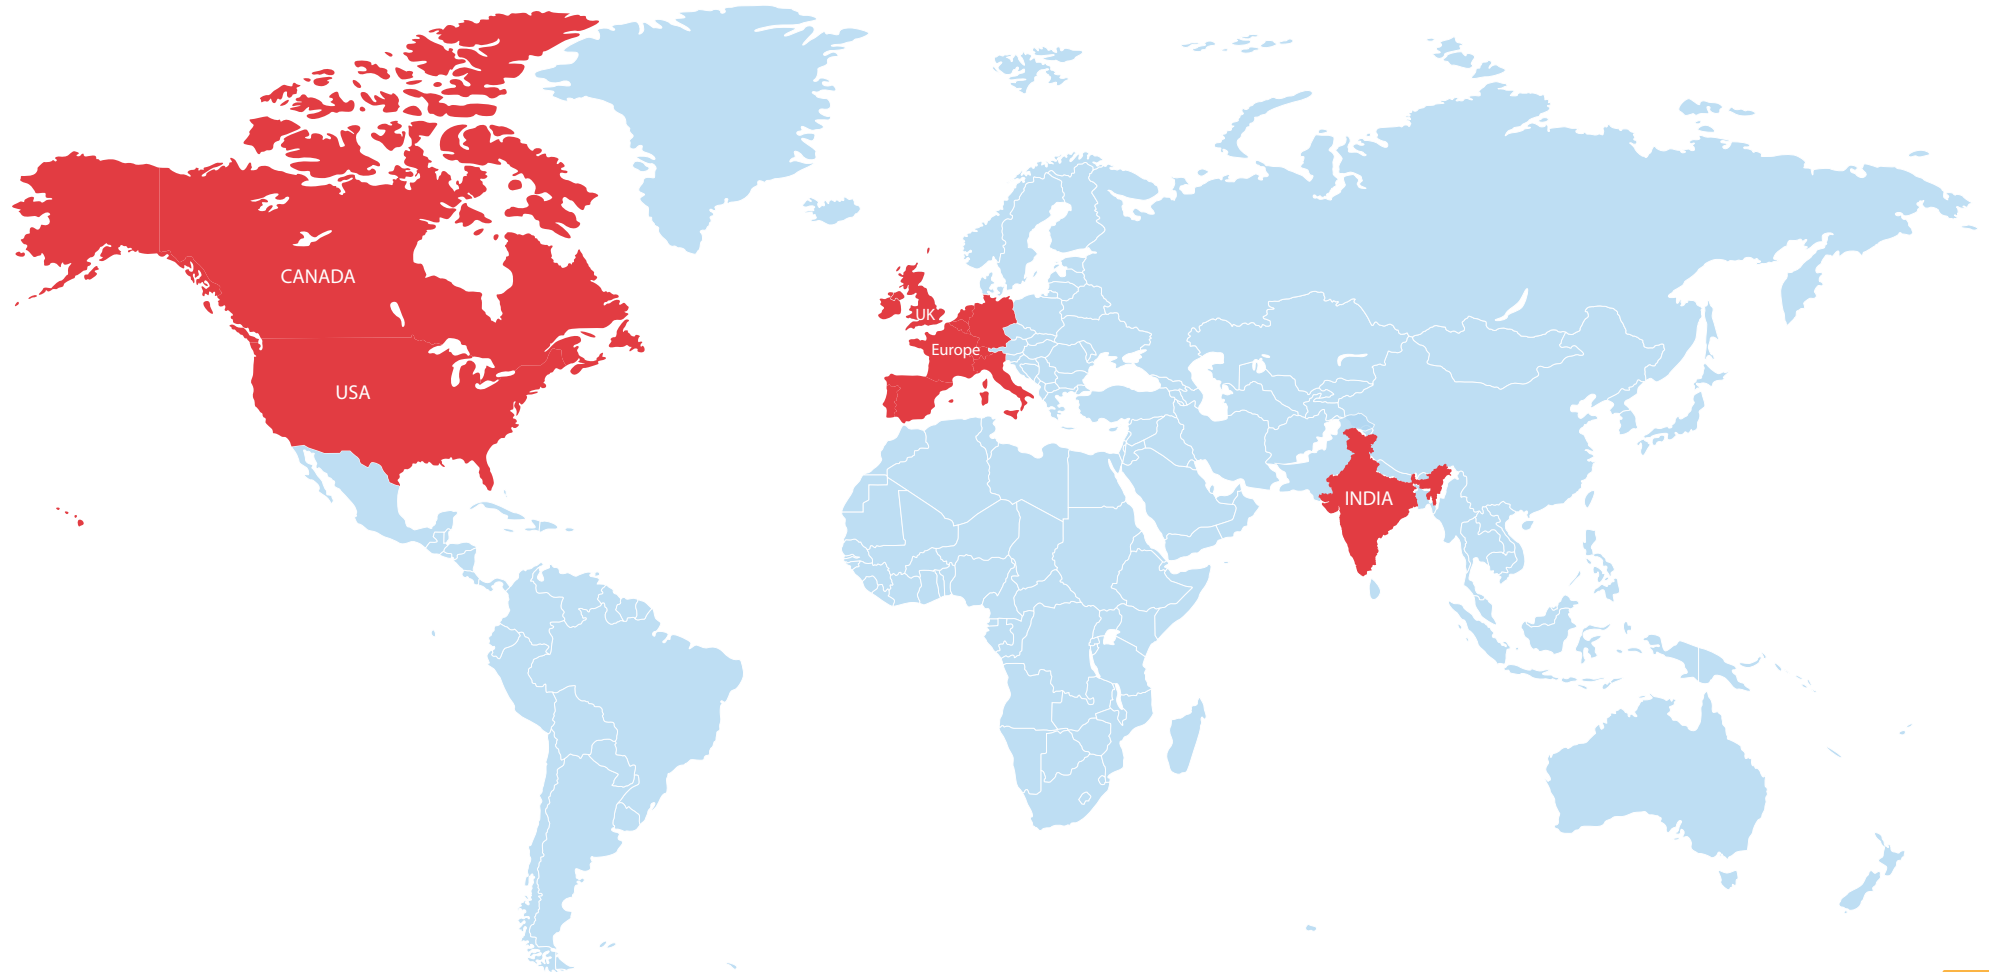

NOW IN INDIA 

INDEX

• ABOUT US	02
• BULBS	03
• CANDLE LAMP	04
• INVERTOR AC/DC BULB	05
• HI- WATT BULB	06
• BRIGHTWINGS	07
• TWISTER LAMP	08
• T LAMP	09
• LED BATTENS	10
• DOWN LIGHTS	11
• UFO DOWNLIGHT	12
• SLIM PANELS	13
• BACKLIT PANELS	14
• GALAXY SURFACE PANEL	15

• METALLICA SURFACE PANEL	16
• MINI SPOT LIGHTS	17
• 2x2 PANELS	18
• FLOOD LIGHTS	20
• STREET LIGHTS	22
• HIGHBAY	23
• SMPS & DRIVERS	24
• STRIP LIGHTS	25
• ROPE LIGHTS	26
• STAT COB	28
• DEEP COB	29
• GLARE COB	30
• TRACK LIGHTS	32
• ZOOM LIGHTS	33



CERTIFICATIONS



BIS



ABOUT US




Launched in the Year 2016, NiFlux has been an ever-growing brand name in the field of LED Lighting. NiFlux brand products are manufactured by Fluxlite Nims (P) Ltd. at Pink city - Jaipur, Rajasthan, India. It is a certified ISO 9001-2015 company for quality management.

Fluxlite Nims (P) Ltd. was founded and established as state-of-art LED Lighting manufacturer in 2005 with only focus to deliver best Quality through proper R&D, Market Responsiveness and ability to scale up manufacturing capacities for meeting Clients need. These qualities distinguish us as a "Preferred Manufacturer" in Lighting Industry.

We are pioneers in developing LED Drivers and Luminaries. We stand out for our 3 in 1 capability to Design , Develop and manufacture LED Lighting Products. We use SAP for Better monitoring of Operations & Accounts. Our Products are Certified for Quality assurance by Bureau of Indian Standards /BEE/ CE / RoHS.

NiFlux has successfully established its market in the USA, Canada, Europe, and UK has gained excellent response . Now we have stepped into the ever evolving markets of INDIA. Our range of products includes Bulbs, Battens, Downlights, Panel series, COB's , LED Strips, LED Rope Lights ,Track Lights, Industrial Highbays, Flood Lights, Street Light range and many more to come...





BULB

- Upto 90% energy saving
- Wide operating voltage range

GLARE SERIES



Wattage	PF	Lumen (Lm)	Beam Angle	Body Type	Cap Type
3W	>0.9	300	120°	A48	B22/E27
5W	>0.9	500	120°	A57	B22/E27
7W	>0.9	700	120°	A57	B22/E27
9W	>0.9	900	120°	A57	B22/E27
12W	>0.9	1200	120°	A65	B22/E27
15W	>0.9	1500	120°	A65	B22/E27
18W	>0.9	1800	120°	A68	B22/E27
20W	>0.9	2000	120°	A68	B22/E27
27W	>0.9	2700	120°	A85	B22/E27



CANDLE LIGHT



- Low Heat Emmission

CANDLE LAMP - FROSTED

Wattage	PF	Lumen (Lm)	Beam Angle	Body Type	Cap Type
3W	>0.5	300	120°	34	E14/E27/B22
4.7 W	>0.5	500	120°	34	E14/E27/B22

CANDLE LAMP - CLEAR

Wattage	PF	Lumen (Lm)	Beam Angle	Body Type	Cap Type
3W	>0.5	300	120°	34	E14/E27/B22





AC-DC LAMPS



- Upto 4 hours backup
- Lesser Charging time
- Fitted with high quality Li-ion Battery
- Battery Overcharging Protection

INVERTER LAMP

Wattage	PF	Lumen (Lm)	Beam Angle	Cap Type
9W	>0.9	900	120°	B22/E27



HIGH WATT BULB



- Long life
- Higher lumens per watt
- Commercial and Industrial use

HI-GLO SERIES

Wattage	PF	Lumen (Lm)	Beam Angle	Body Type	Cap Type
30W	>0.9	3000	120°	A85	B22/E27
40W	>0.9	4000	120°	A100	B22/E27
50W	>0.9	5000	120°	A120	B22/E27





FAN LAMP



- High Turning Flexibility
- Wider light distribution

BRIGHT WINGS

Wattage	PF	Lumen (Lm)	Beam Angle	Cap Type
30W	>0.9	3000	120°	B22/E27
40W	>0.9	4000	120°	B22/E27



TWISTER LAMP





- High Turning Flexibility
- Wider light distribution

TWISTER SERIES

Wattage	PF	Lumen (Lm)	Beam Angle	Cap Type
6W	>0.9	510	120°	B22/E27
12W	>0.9	1080	120°	B22/E27



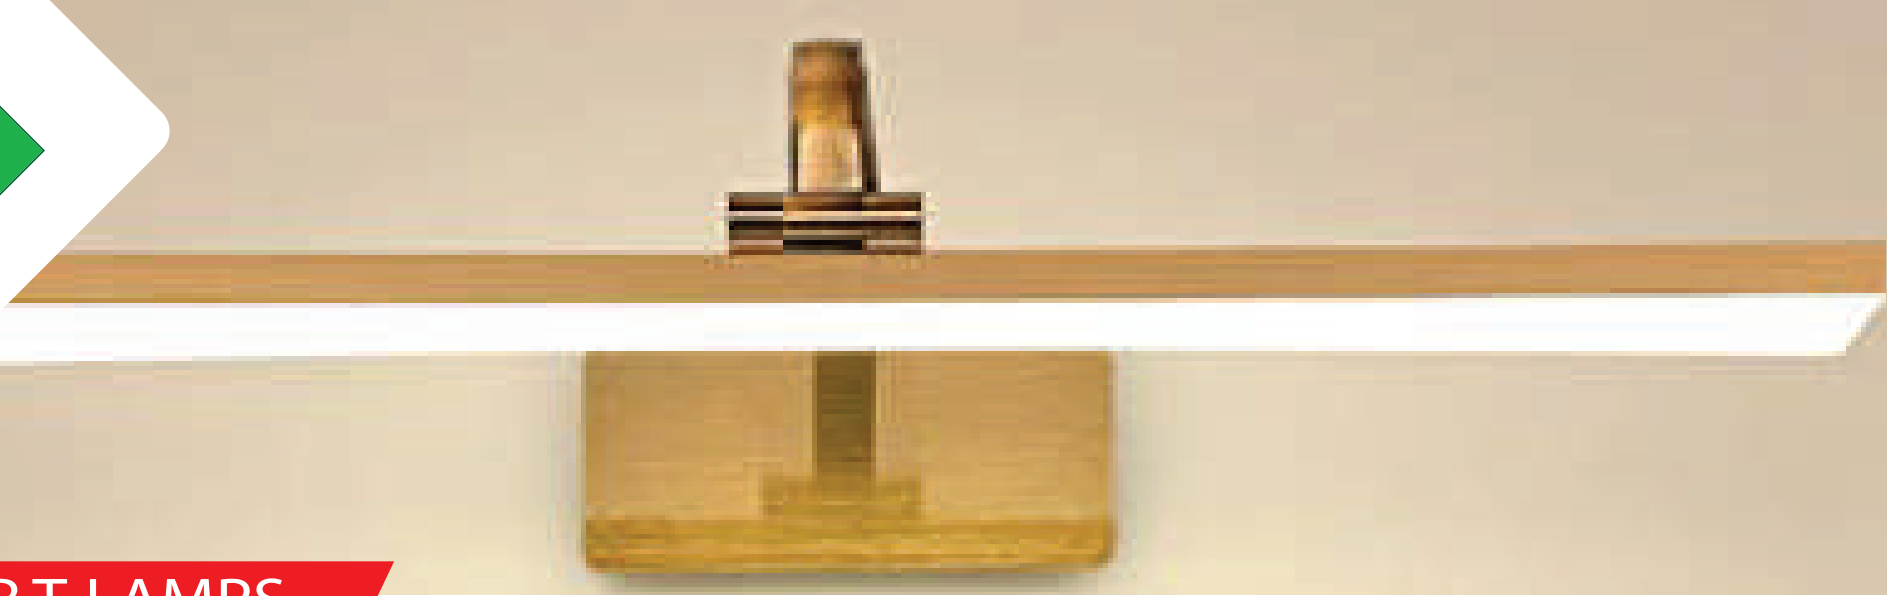

ANGULAR T-LAMPS



- High Turning Flexibility
- Wider light distribution

T-LAMPS

Wattage	PF	Lumen (Lm)	Beam Angle	Cap Type
10W	>0.9	990	120°	B22/E27
14W	>0.9	1400	120°	B22/E27





LED BATTENS



- Sleek Design & Energy Saving upto 80%.
- Instant glow with uniform light distribution

LED BATTEN SERIES

Wattage	PF	Lumen (Lm)	Beam Angle	Body Type
5W	>0.9	500	120°	CoEx PC
10W	>0.9	1000	120°	CoEx PC
18W	>0.9	1800	120°	CoEx PC
20W	>0.9	2000	120°	CoEx PC
30W	>0.9	3000	120°	Aluminium





LED DOWNLIGHTS

- Economic fixtures for better aesthetic looks



LED DOWNLIGHT SERIES

Wattage	PF	MODEL	Lumen (Lm)	Beam Angle	Dimension (mm)	Cutout (mm)	Material
3W	>0.9	REGULAR	240	120°	φ80x46(h)	46	PC
5W	>0.9	REGULAR	400	120°	φ114x63(h)	85	PC
7W	>0.9	REGULAR	560	120°	φ114x63(h)	85	PC
9W	>0.9	REGULAR	765	120°	φ114x63(h)	85	PC
5W	>0.9	NEXA	400	120°	φ104x55(h)	85	PC
7W	>0.9	NEXA	560	120°	φ104x55(h)	85	PC
5W	>0.9	STAR	400	120°	φ108x60(h)	85	PC
7W	>0.9	STAR	560	120°	φ108x60(h)	85	PC
5W	>0.9	STAR	RBP	120°	φ108x60(h)	85	PC
5W	>0.9	STAR	WWN	120°	φ108x60(h)	85	PC






UFO DOWNLIGHT

- Innovative UFO look
- Slim junction box mountable light
- Wider light distribution

UFO DOWNLIGHT

Wattage	PF	Lumen (Lm)	Beam Angle	Mounting
8W	>0.9	700	120°	Recess
15W	>0.9	1350	120°	Recess





SLIM PANELS



- Sleek Design for elegant look
- Shock Proof housing for safety

GLARE PANEL SERIES

Wattage	PF	Lumen (Lm)	Beam Angle	Dimension (mm)	Cutout (mm)	Material
6W	>0.9	420	120°	φ120x27(h)	104	PC
12W	>0.9	840	120°	φ174x27(h)	154	PC
15W	>0.9	1050	120°	φ174x27(h)	154	PC
18W	>0.9	1260	120°	φ225x27(h)	205	PC



CRI
>80



INPUT
100-320V AC



25,000
Hours



BACKLIT PANELS

- Housing made of high quality thermoplastics
- Slim boundary for better aesthetic appeal.

BACKLIT PANEL SERIES

Wattage	PF	Lumen (Lm)	Beam Angle	Dimension (mm)	Cutout (mm)	Material
5W	>0.9	500	120°	φ82x36(h)	60	PC
8W	>0.9	800	120°	φ116x36(h)	96	PC
12W	>0.9	1200	120°	φ166x36(h)	145	PC
15W	>0.9	1500	120°	φ166x36(h)	145	PC
20W	>0.9	2000	120°	φ220x36(h)	201	PC




CRI
>80



INPUT
100-320V AC



25,000
Hours



SURFACE PANEL



- Compact Fixture
- Higher light Spread

GALAXY SURFACE SERIES

Wattage	PF	Lumen (Lm)	Beam Angle	Dimension (mm)	Material
8W	>0.9	700	120°	φ86x42(h)	PC
15W	>0.9	1350	120°	φ140x45(h)	PC

*Available in all colors



CRI
>80



INPUT
100-320V AC



25,000
Hours



SURFACE PANEL

- Aluminum powder coated Housing for higher heat dissipation.

METALLICA SURFACE PANEL SERIES

Wattage	Body Color	Beam Angle	PF>	Lumen (lm)
8W	WHITE	120°	0.9	800
12W	WHITE	120°	0.9	1250
15W	WHITE	120°	0.9	1550




CRI
>80




INPUT
100-320V AC



25,000
Hours



MINI SPOT LIGHTS

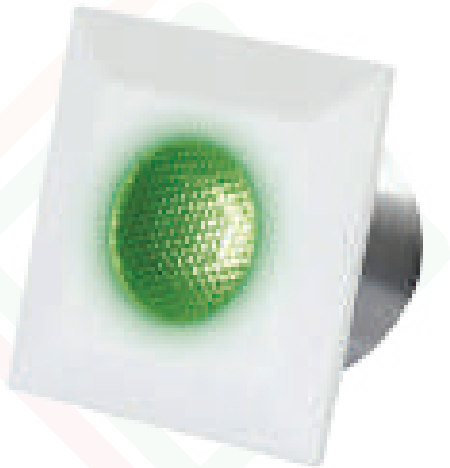

- Long life upto 20000 hrs
- Low heat and energy consumption compared to halogen lamp

MINI SPOT LIGHT SERIES

Wattage	Body Color	Beam Angle	PF>	Lumen (lm)
2W	WHITE	ROUND/SQUARE	0.5	160



CRI
>80



INPUT
100-320V AC



20,000
Hours



2 x 2 PANELS

- Slim metal body panel
- Best for Institutional use
- Higher light distribution

QUAD PANEL SERIES

Wattage	PF	Lumen (Lm)	Beam Angle	Mounting
36W	>0.9	2700	120°	Recess
40W	>0.9	3000	120°	Recess
45W	>0.9	3400	120°	Recess
48W	>0.9	3600	120°	Recess





HI-LITE FLOOD LIGHT SERIES

Wattage	PF	Lumen (Lm)	Body Type	IP	Surge
10W	> 0.50	1000	ADC-12	IP -66	4KV
20W	>0.9	2000	ADC-12	IP -66	4KV
30W	>0.9	3000	ADC-12	IP -66	6KV
50W	>0.9	5000	ADC-12	IP -66	6KV
100W	>0.9	10000	ADC-12	IP -66	6KV
150W	>0.9	15000	ADC-12	IP -66	6KV
200W	>0.9	20000	ADC-12	IP -66	6KV



HI-LITE FLOOD LIGHT




PRIMA FLOOD LIGHT

- IP66 protection
- High-surge protection

PRIMA FLOOD LIGHT SERIES

Wattage	PF	Lumen (Lm)	Body Type	IP	Surge
10W	> 0.50	1000	ADC-12	IP -66	4KV
20W	>0.9	2000	ADC-12	IP -66	4KV
30W	>0.9	3000	ADC-12	IP -66	6KV
50W	>0.9	5000	ADC-12	IP -66	6KV
100W	>0.9	10000	ADC-12	IP -66	6KV
150W	>0.9	15000	ADC-12	IP -66	6KV
200W	>0.9	20000	ADC-12	IP -66	6KV







HI-GLO STREET LIGHT



- Higher Surge Protection
- Casted Body for long life



HI-GLO STREET LIGHT SERIES

Wattage	PF	Lumen (Lm)	Body Type	IP	Surge
15W	>0.9	1500	ADC-12	IP -66	4KV
20W	>0.9	2000	ADC-12	IP -66	4KV
30W	>0.9	3000	ADC-12	IP -66	10KV
50W	>0.9	5000	ADC-12	IP -66	10KV
100W	>0.9	10000	ADC-12	IP -66	10KV
150W	>0.9	15000	ADC-12	IP -66	10KV
200W	>0.9	20000	ADC-12	IP -66	10KV



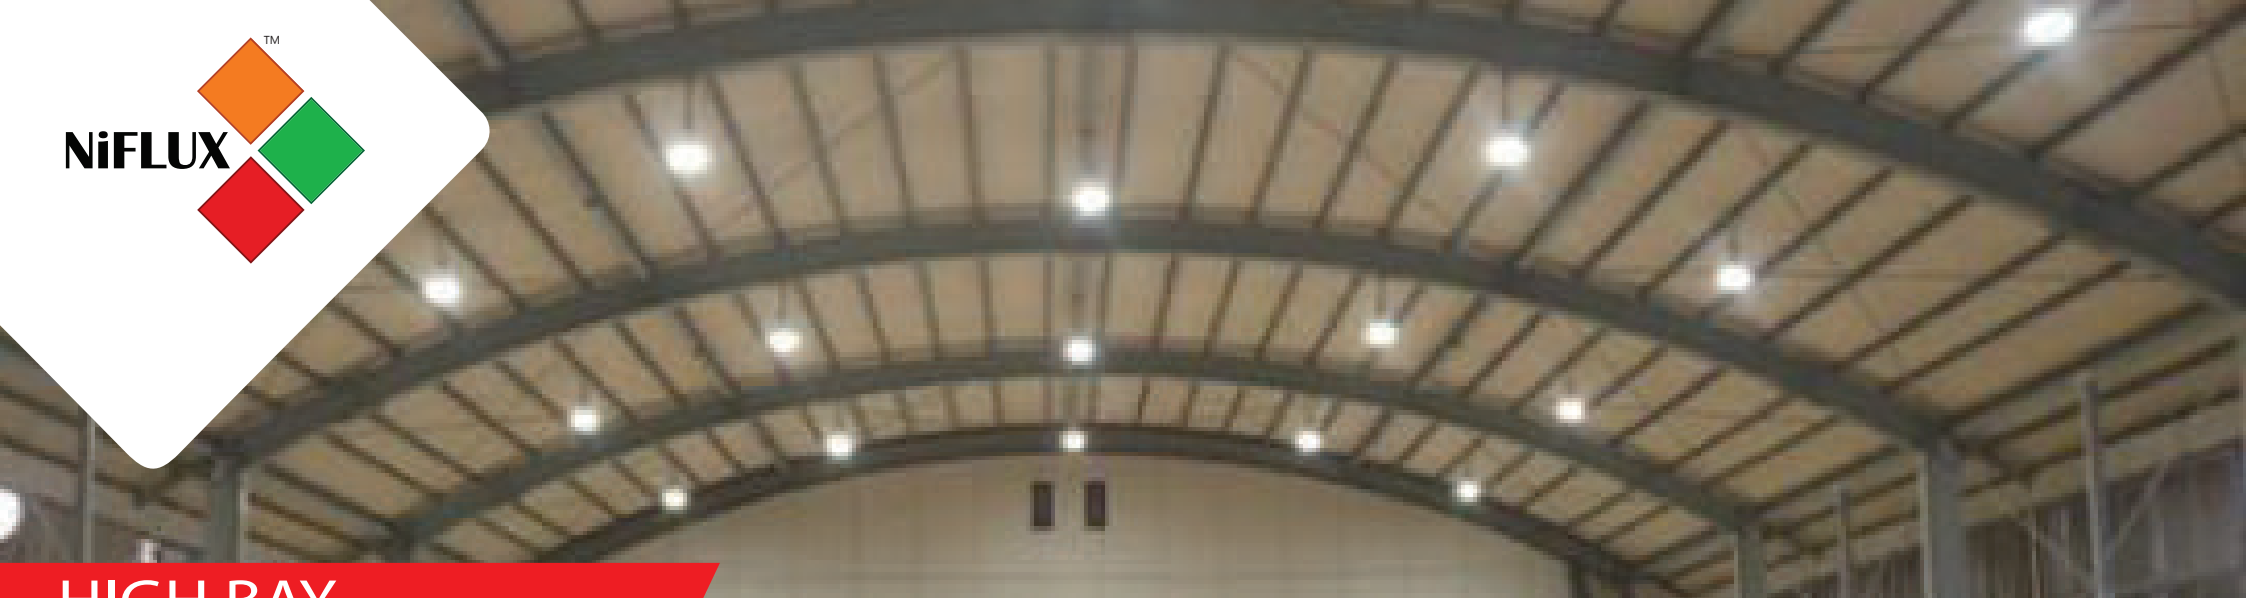

HIGH BAY


- High Lumen
- Wider light distribution



HIGH BAY SERIES

Wattage	Body Color	Beam Angle	PF>	Lumen (lm)
80	BLACK	120°	0.9	7200
120	BLACK	120°	0.9	12000
150	BLACK	120°	0.9	15000



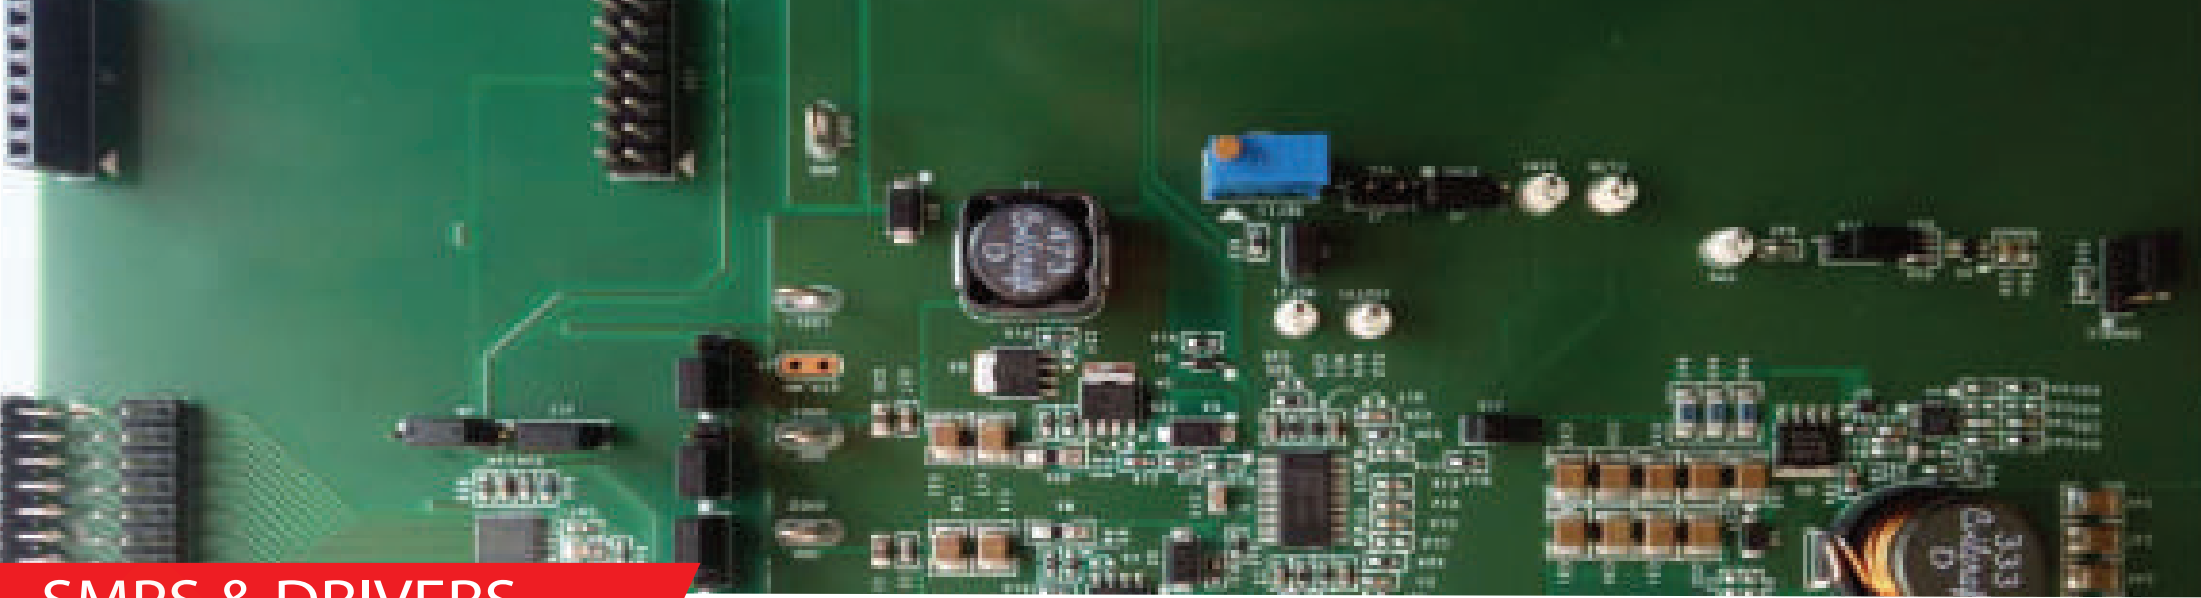

SMPS & DRIVERS

- Better Heat dissipation
- Constant Voltage output
- Short Circuit Protection



SMPS & DRIVERS SERIES

Item No.	I/P voltage	O/P Voltage	O/P current
RS-8060	140-265V	12V	5A
RS-8025	140-265V	12V	2A




CRI
>80



INPUT
100-320V AC



25,000
Hours



STRIP LIGHTS




- High Lumen
- Wider light distribution
- Decoration lights in various colors
- Shock proof IP20

LED STRIP LIGHT SERIES

Item No	No of leds	Voltage	LED Wattage	Length
2835	60 Led	DC 12V	0.2	5M
2835	120 Led	DC 12V	0.2	5M
2835	180 Led	DC 12V	0.2	5M
2835	240 Led	DC 12V	0.2	5M

AVAILABLE IN WHITE / WARM WHITE / NATURAL WHITE / RED / BLUE / PURPLE / PINK / AMBER COLORS



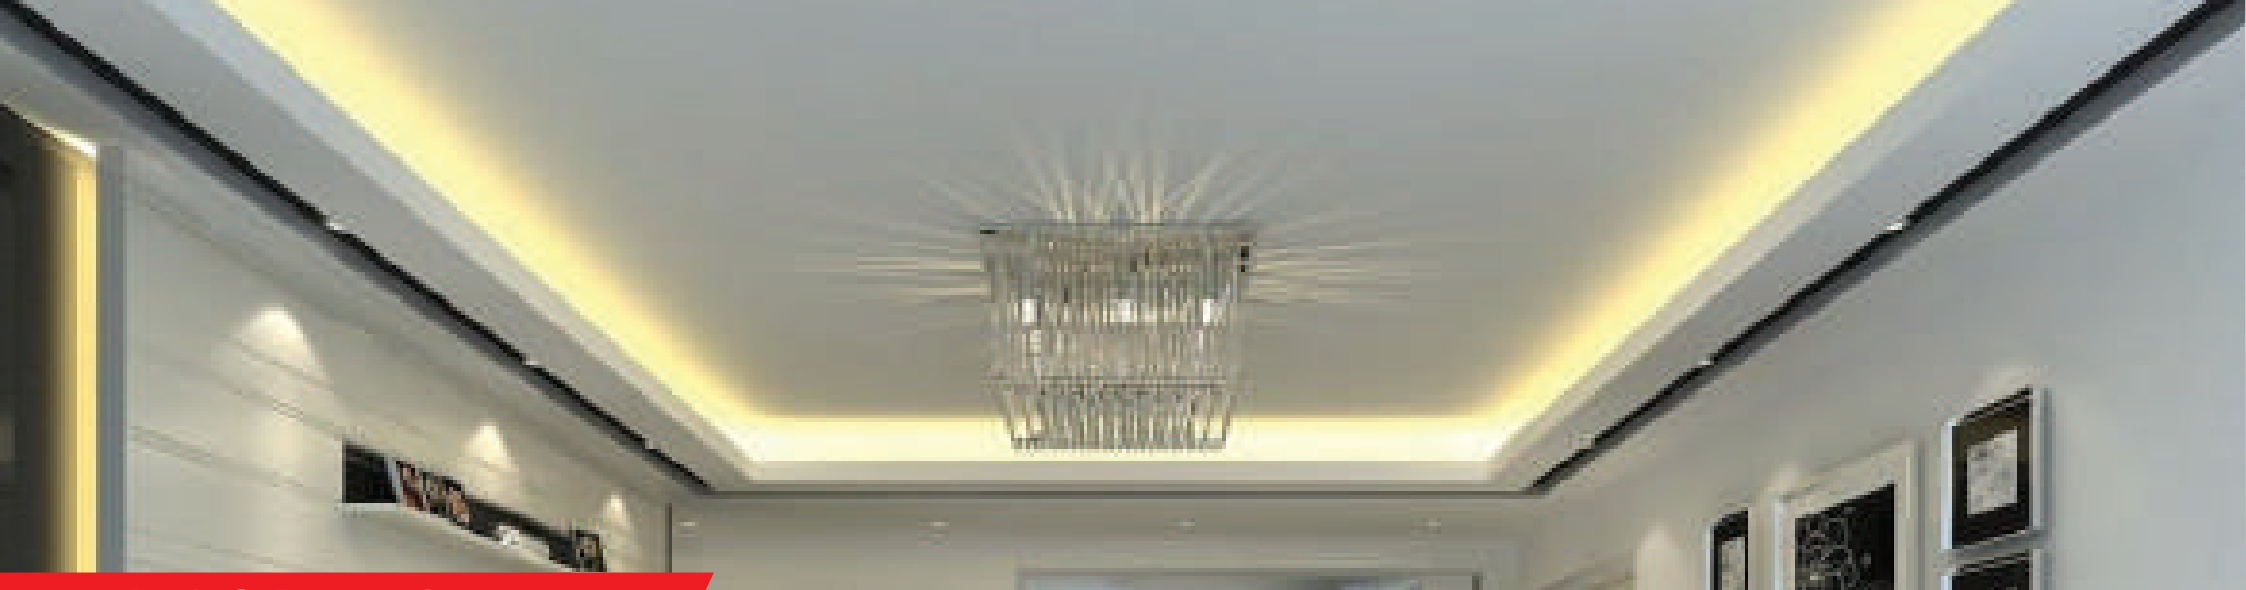

LED ROPE LIGHT

- Higher lumens
- IP65
- Available in Various Colors



LED ROPE LIGHT SERIES

Type	Beam Angle	Watts/Led	PF>	Shape
2835	120°	0.2W	0.5	FLAT
3014	120°	0.18W	0.5	FLAT

AVAILABLE IN RED/BLUE /WW/GREEN/PURPLE/PINK COLORS







STAT COB SERIES

- Energy efficient
- Low heat dissipation high reflux

STAT COB SERIES

Wattage	Body Color	Beam Angle	PF>	Lumen (lm)
3W	WHITE	36°	0.5	180
6W	WHITE	36°	0.5	450
9W	WHITE	36°	0.9	720
12W	WHITE	36°	0.9	1050
15W	WHITE	36°	0.9	1250
24W	WHITE	36°	0.9	1550
30W	WHITE	36°	0.9	2050




CRI
>80



INPUT
100-320V AC



20,000
Hours



DEEP COB SERIES




- 24° beam Angle
- Better Aesthetic look energy efficient

DEEP COB SERIES

Wattage	Body Color	Beam Angle	PF>	Lumen (lm)
6W	WHITE	24°	0.5	450
12W	WHITE	24°	0.9	1050
15W	WHITE	24°	0.9	1250



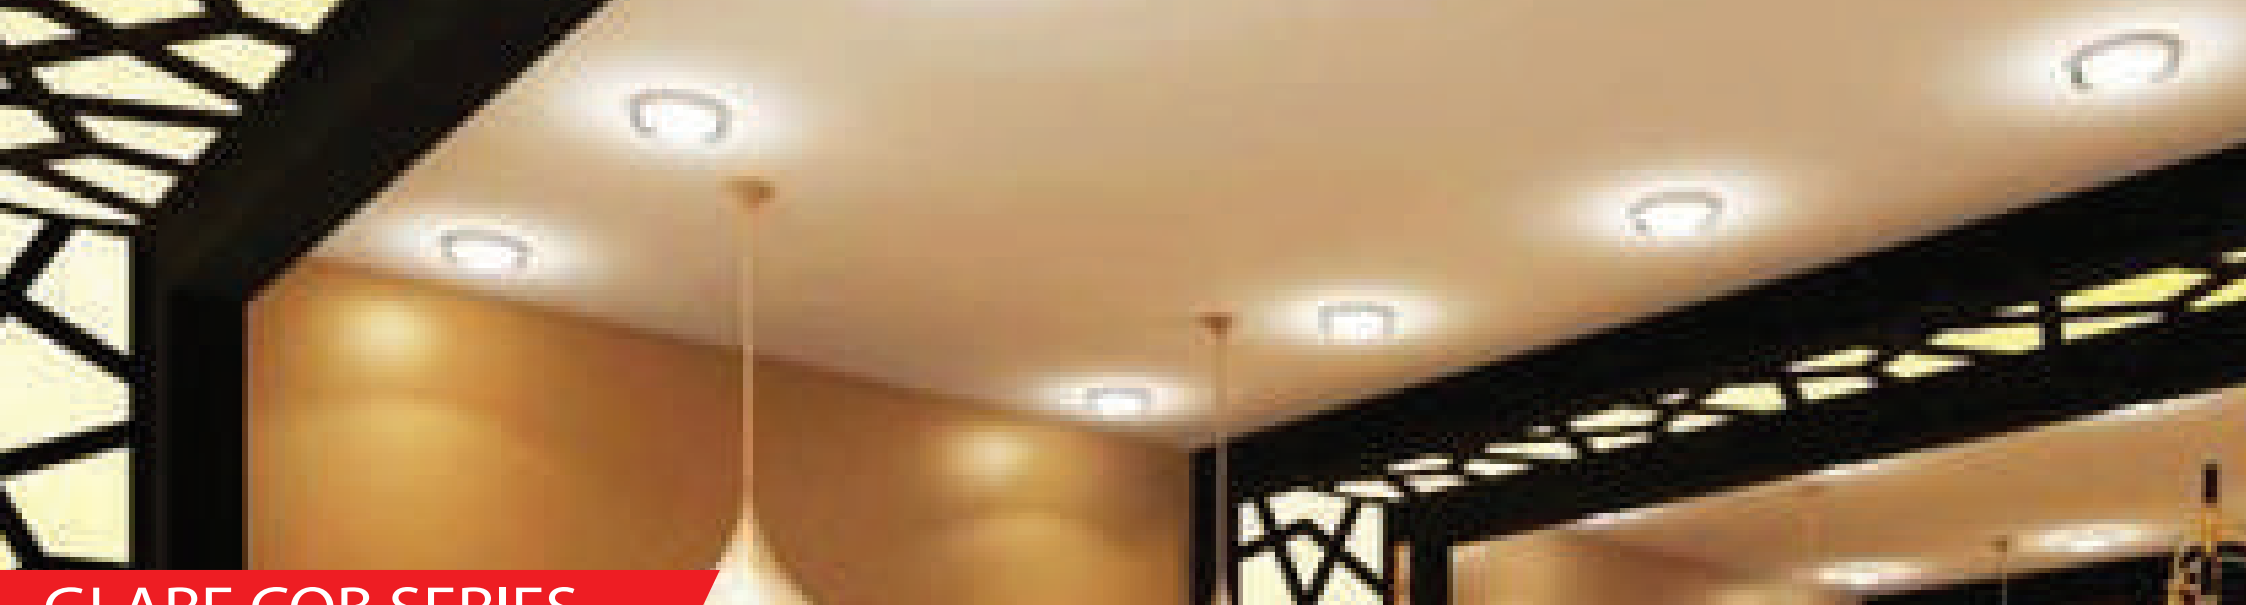

GLARE COB SERIES



- 30° Turnable
- Low heat dissipation high reflux

GLARE COB SERIES

Wattage	Body Color	Beam Angle	PF>	Lumen (lm)
3W	WHITE	45°	0.5	180
6W	WHITE	45°	0.5	450
9W	WHITE	45°	0.9	720
12W	WHITE	45°	0.9	1050
15W	WHITE	45°	0.9	1250
24W	WHITE	45°	0.9	1550
30W	WHITE	45°	0.9	2050



CRI
>80



INPUT
100-320V AC



20,000
Hours





TRACK LIGHT SERIES


- COB Based fully adjustable track
- Available in black/white body
- 360° Turnable
- High Efficiency



TRACK LIGHT SERIES

Wattage	Body Color	Beam Angle	PF>	Lumen (lm)
20W	WHITE/BLACK	24°	0.9	1550
30W	WHITE/BLACK	24°	0.9	2050
40W	WHITE/BLACK	24°	0.9	2550



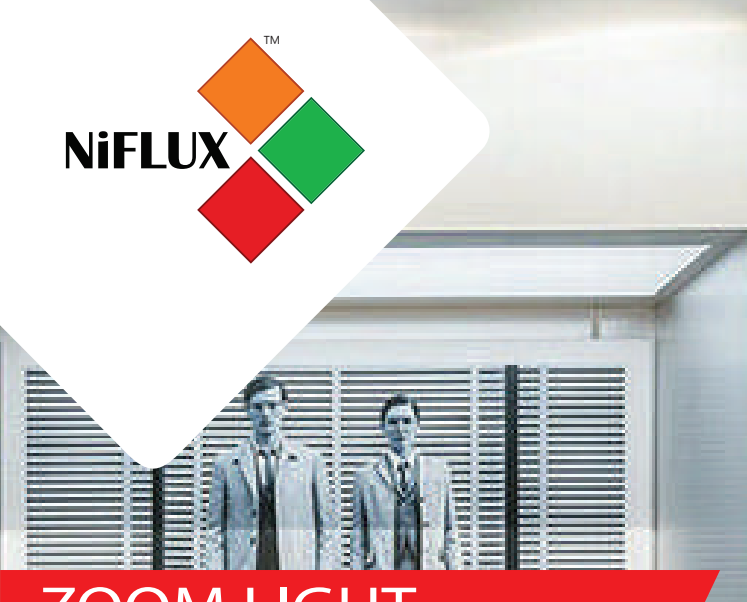

ZOOM LIGHT



- 360° Turnable
- High relux

ZOOM LIGHT SERIES

Wattage	Body Color	Beam Angle	PF>	Lumen (lm)
20W	WHITE	40°	0.9	1550
30W	WHITE	40°	0.9	2050
40W	WHITE	40°	0.9	2550





Note:-

- Actual product may differ to as in photos due to changes in design time to time.
- For improvement specifications may change.
- Dimensions may vary with due tolerances of +/-3%
- Wattage and lumens are variable with general tolerance of 10%

- Available in many colors. 6500K, 2700K, 4000K, Red, Blue, Green, Pink and more.
- Lumens mentioned in tables are of 6500K light color, it will vary in other light colors and temperatures.
- All products are Non -Dimmable.
- E and OE.



Factory/Office

Fluxlite Nims Pvt. Ltd.

*G 986 to 991, Phase 3, Sitapura Industrial Area,
Jaipur, Rajasthan 302022 (INDIA)*

Phone no.: 0141-2771980

Customer care: feedback@fluxlitenims.com

www.fluxlitenims.com

follow us on   

